

SPG 12V - 75Ah | VRLA GEL Battery

SPG are sealed valve-regulated lead acid recombinant batteries that are non-spillable and maintenance-free. Although initially more expensive to purchase than AGM they offer a lower total cost to own over the life of the battery. When it comes to performance and life span the SPG batteries outperform other technologies and provide the greatest value for your stand-by application or cycling needs.

Technical Features

- Micro millimeter SiO₂ and H₂SO₄ gelled electrolyte technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.
- Case and cover available in both standard and flame retardant ABS.


Specifications

Nominal Voltage	12 V		
Number of cells	6		
Design Life	12 years		
Dimensions	Length	260 mm	
	Width	168 mm	
	Height	211 mm	
	Total Height	214 mm	
Approx. Weight	22.5 kg		
Nominal Capacity (25°C)	20 hours rate (3.86 A, 10.5 V)	77.2 Ah	
	10 hours rate (7.50 A, 10.5 V)	75.0 Ah	
	5 hours rate (12.50 A, 10.5 V)	62.5 Ah	
	1 hour rate (45.00 A, 9.6 V)	45.0 Ah	
Max. Discharge Current (25°C)	700 A (5s)		
Short Circuit Current	2020 A		
Internal Resistance	7 mOhms		
Fully Charged battery (25°C)	3% of capacity declined per month at 25°C (average)		
Operating Temperature Range	Discharge	:-15~50°C	
	Charge	:-10~50°C	
	Storage	:-20~50°C	
Max. Charging Current	14.0 A		
Charging Characteristics (25°C)	Float Charging Voltage	13.50 V to 13.80 V	
	Temperature Compensation	-18 mV/°C	
	Cyclic Charging Voltage	14.40 V to 14.70 V	
	Temperature Compensation	-30 mV/°C	

Battery Construction

Component	Positive Plate	Negative Plate	Container	Cover	Safety Valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Pb	Fiberglass	Gelled acid

Dimensions

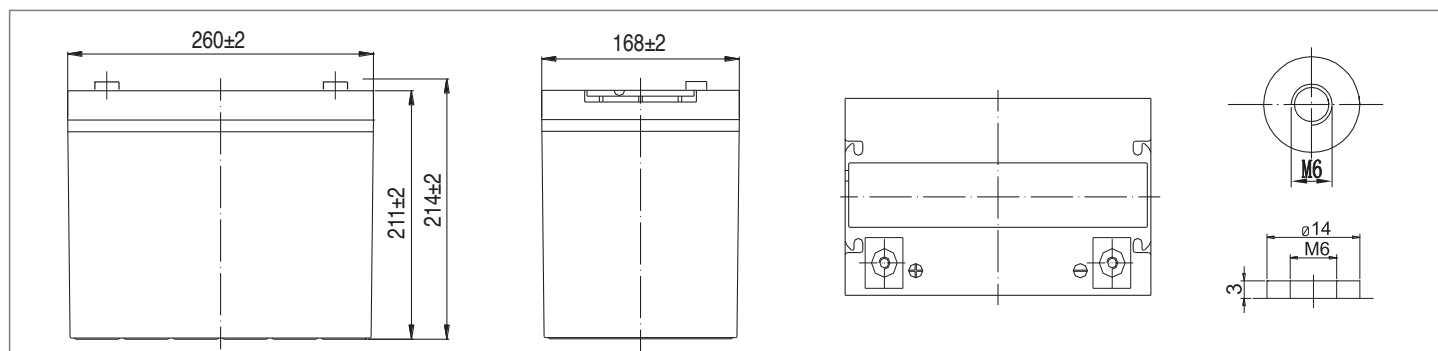

Constant Current Discharge (Amperes) at 25°C

End Voltage (Volts/Cell)	15min	30min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.60 V	114	72.0	45.0	27.0	18.4	14.5	12.7	11.5	9.03	7.64	3.93
1.65 V	111	70.6	44.3	26.9	18.3	14.4	12.6	11.4	8.97	7.62	3.92
1.70 V	107	68.4	43.2	26.6	18.1	14.3	12.5	11.3	8.91	7.60	3.91
1.75 V	104	66.7	42.3	26.2	18.0	14.3	12.5	11.3	8.85	7.55	3.89
1.80 V	98.0	64.3	41.0	25.6	17.5	13.8	12.1	10.9	8.58	7.50	3.86


Constant Power Discharge (Watts) at 25°C

End Voltage (Volts/Cell)	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
1.60 V	1252	808	513	313	216	171	150	136	107	91.2	47.2
1.65 V	1222	792	505	311	215	170	149	135	107	91.0	47.1
1.70 V	1177	767	492	308	213	169	148	134	106	90.7	47.0
1.75 V	1137	749	483	304	212	168	147	133	105	90.2	46.7
1.80 V	1076	721	468	296	205	163	143	129	102	89.6	46.4


Note: The above characteristics data can be obtained within three charge/discharge cycles.

SPG 12V - 75Ah | VRLA GEL Battery


Temperature Effects on Float Life

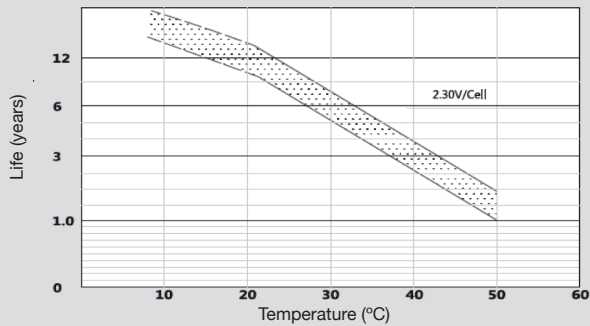


Self Discharge Characteristics

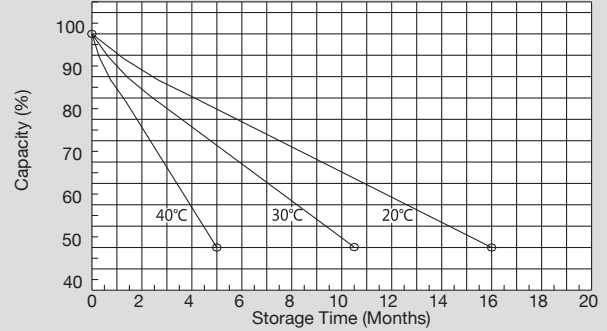


Discharge Characteristics (25°C)

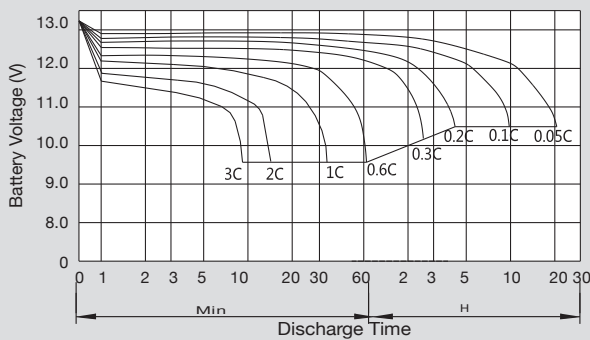


Charging Characteristics (25°C)

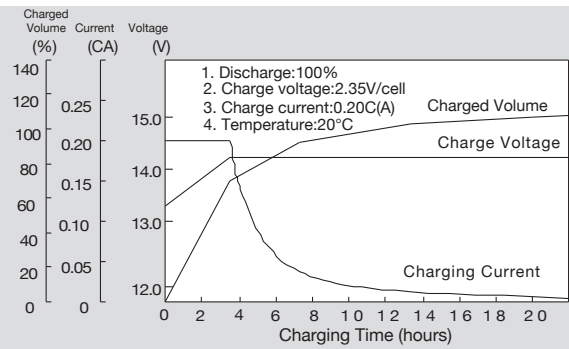


Relationship Between Charging Voltage and Temperature

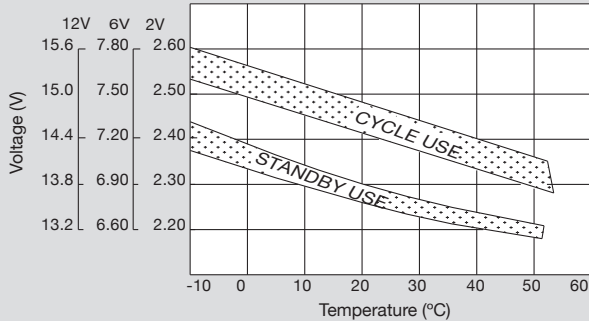


Relationship Between OCV and Residual Capacity (25°C)

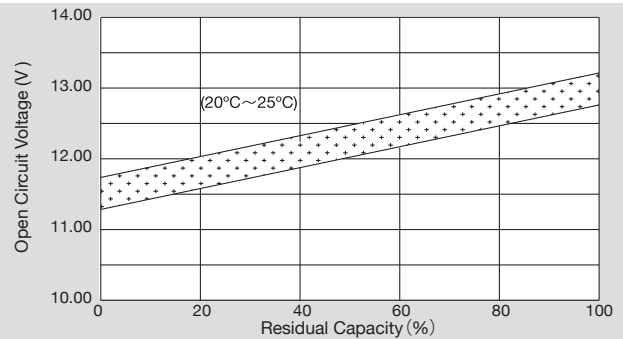

Cycle Service Life in Relation to Depth of Discharge

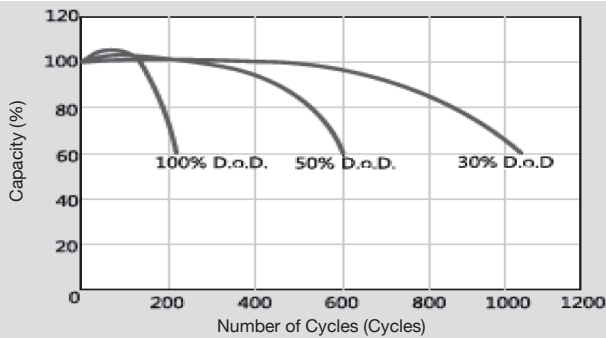

Temperature Effects on Capacity

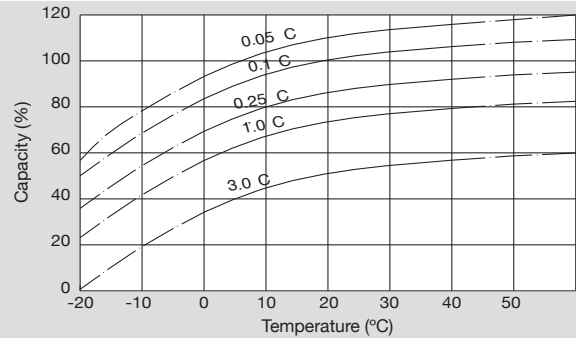

SYSTEMS SUNLIGHT S.A.

Headquarters

2 Ermou & Nikis Str., Syntagma Sq.
105 63 Athens, Attica, Greece

T +30 210 6245400 F +30 210 6245409

European Manufacturing Plant

672 00 Neo Olvio, Xanthi, Greece

T +30 25410 48100 F +30 25410 95446

Global Service Department

366 Tatoiou Str.

136 73 Acharnes, Attica, Greece

T +30 210 6245600 F +30 210 6245619

